



Quick Change Applicator


## Crimping Applicator 32.100

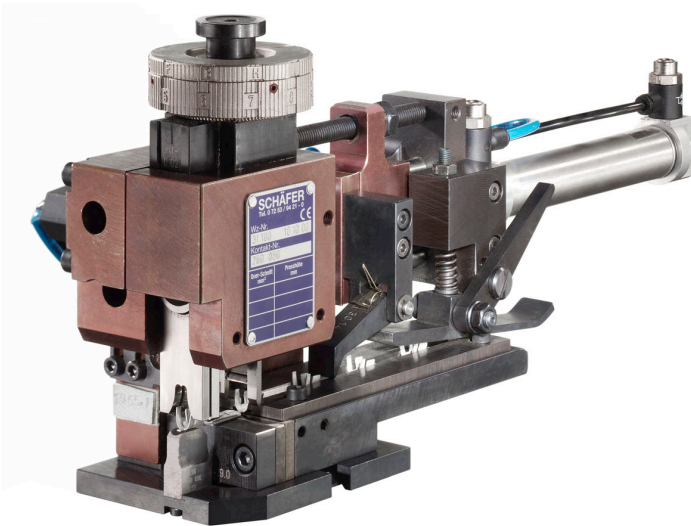

- Pneumactical rear feed
- Reproducible crimp height adjustment
- Cross sections up to 16 mm<sup>2</sup>
- Multiple applications
- Simple operation and robust design
- Made for bench top and automated machines

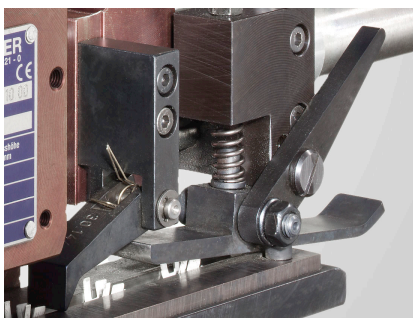

pneumactical rear feed

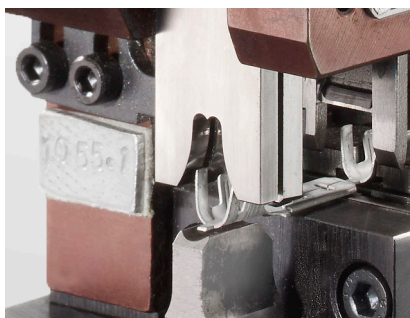

for longitudinally belted terminals



crimp height adjustment

## Crimping Applicator 32.100



### Options

- Wire Crimper
- Insulation Crimper
- Crimp Anvil
- Counter

### Description

The crimping applicator 32.100 with quick change system is made for crimping longitudinally belted terminals with wider distances between each other on wires with cross sections up to 16 mm<sup>2</sup>.

This applicator is designed with an indexed rotary head for reproducible, independent crimp height adjustment of both the wire and insulation. With the optional mechanical counter, it is easy to monitor the production run and control the wear parts.

Pictures are showing the applicator 31.100

### Range of Application

Schaefer crimping applicators are used in the series production of the cable processing industry.

### Examples of use

Crimping applicators to connect wires and terminals in multiple applications made for bench top crimp machines and also as equipment for semi or fully automated systems.

### Product Combination Possibilities

The applicator 32.100 can be used in Schaefer crimp machines and if designed accordingly also with Schaefer stripping modules.

## Technical Data

Crimping Applicator 32.100

<b>Supplies</b>	
Compressed Air	6 bar, dried and oilfree
<b>Processable Wire</b>	
Cross Sections	up to 16 mm <sup>2</sup>
<b>Processable Terminals</b>	
Material Thickness	up to 0,8 mm
Terminal Pitch	28 - 56 mm
Terminal Bar	1,0 - 6,5 mm
Terminal Feeding	rear feed
<b>Actuation</b>	
Feeding	pneumatical
Stroke	40 mm
Width of the Crimping Punch	24 mm
<b>Wire Crimp Height Adjustment</b>	
Increments	0,02 mm
Maximum	2 mm
<b>Insulation Crimp Height Adjustment</b>	
Increments	0,02 mm
Maximum	2 mm
<b>Temperature Range</b>	
Operation	15 °C - 40 °C
Storage	0 °C - 60 °C (rF < 80%)
<b>Dimensions &amp; Weight</b>	
W x D x H	70 x 350 x 160 mm [1]
W x D x H incl. Packing	270 x 540 x 200 mm [1]
Weight	5,9 kg [1]
Weight incl. Packing	7,9 kg [1]

[1] approximately in basic configuration

## Sales and Service for Turkey



### **SAFF Makine Sanayi ve Dis Ticaret Ltd. Sti.**

Akcaburgaz Mevkii Alkop Sanayi Sitesi A-6 Blok No:20

Esenyurt - Istanbul

Phone: +90 212 623 02 33 - 34

Fax: +90 212 623 02 35

Email: [info@saff.com.tr](mailto:info@saff.com.tr)

URL: [www.saff.com.tr](http://www.saff.com.tr)

## Headquarters



### **Schäfer Werkzeug- und Sondermaschinenbau GmbH**

Dr.-Alfred-Weckesser-Str. 6

76669 Bad Schönborn

Phone: +49 7253 9421-0

Fax: +49 7253 9421-94

Email: [info@schaefer.biz](mailto:info@schaefer.biz)

URL: [www.schaefer.biz](http://www.schaefer.biz)

**NEW PRODUCTS  
FOR SEAL PROCESSING**



**VISIT  
[www.schaefer.biz](http://www.schaefer.biz)**