




Via delle Prese, 16/18 – 36015 SCHIO (VI)  
 Tel. 0445. 576115 – fax. 0445.575931  
 Assistenza Tecnica : Tel. 0445. 576149 – Fax. 0445. 501255  
 e-mail: [macchine@samecitaly.it](mailto:macchine@samecitaly.it) – web site: <http://www.samecitaly.it>

# CABLE CUTTING, UNJACKETING AND STRIPPING MACHINE TYPE SAMEC TSS-150A

for single wire, multiwire and flat cables

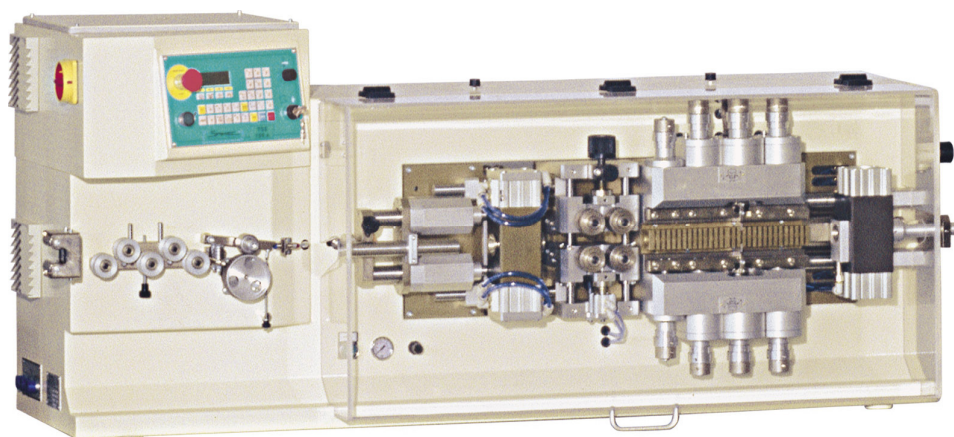

<b>Cutting jacket stripping, inner conductor stripping machine Type TSS-150A</b>	<b>with servo-motor and positioned cut, 4 heads, one dedicated to separate cut the 4<sup>th</sup> multiwire unsheathing head is empowered too</b>
Safety guards:	In accordance with CE standards
Data set-up:	by keyboard and back lighted display
Programmable quantity of pieces:	max. 9.999
Storable customer quantity	max. 50
Storable cable quantity per customer	max. 20
Quantity of batches:	programmable
Workable length:	min. 100 mm. – max.500 m. ( without separate cut )
Workable length:	min. 240 mm. – max.500 m. ( with separate cut )
Machine hole:	<b>mm. 22 x 22</b>
Workable outer diameter:	min. 3 mm. – max. 18 mm.
Max cross section ( multiconductor stranded cable)	max.90 mm <sup>2</sup> with separate cut max.110 mm <sup>2</sup> with double separate cut
Insulator displaceable length:	max. 55 mm.
Single wire stripping length:	min. 3 mm.
Short end jacket stripping length:	max. 220 mm. ( without separate cut )
Short end jacket stripping length:	max. 120 mm. ( with separate cut )
Opposite end programmable stripping length:	max. 9.000 mm.
Total non programmed stripping length	290 mm. ( without separate cut )
Cable speed:	with servo-motor assistance: max. 2,5 m./sec.
Acceleration and deceleration ramps:	Programmable
Machine pre-arranged for line connection with:	pre-feeder or pay off, marking machine, linear collector, coiler
Power supply	220/230V single phase – 50/60 Hz.
Air supply:	6-8 bar uninterrupted
Max absorbed power:	1,5 KW